

Cam Lock, Standard

Part numbers: CL2-C1N

GEN I Mode

| CAW | Version 9.0 or newer |
|------------|-------------------------------------|
| Enterprise | <input checked="" type="checkbox"/> |
| Basic | <input checked="" type="checkbox"/> |


GEN 2 Mode

| CAW | Version 9.4 or newer |
|------------|-------------------------------------|
| Enterprise | <input checked="" type="checkbox"/> |
| Basic | <input checked="" type="checkbox"/> |

The CyberLock CL-C1N cam lock is an electronic version of a 3/4" Double-D cam lock. The core's electronics are encased in a stainless steel face and contact pins. The outer shell is made of nickel-plated brass, and the cam latch is stainless steel.

The CL-C1N has 1-1/8" body length and can be configured two ways. The first way is a key rotation of 360° and a cam latch rotation of 90°, and the key is released from the lock when it is in the open position, thus making it key retaining. The CL-C1N comes with 3 different drive cams and instructions on how to assemble the lock for the desired configuration.

Applications include cabinets, drawers, display cases and cash boxes.

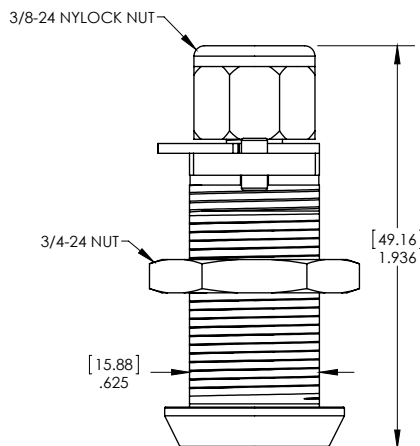

Notes:
 Dimensions in inches (mm)
 Drawing not to scale
 Ø indicates diameter

