



Material	SMC (Sheet Moulding Compound), PC for window			
Operating Temperature	-50° C to + 200° C			
Glow Wire Capability / Flammability	960° / UL94 V0			
Expected UV Life (Direct Exposure)	25 years +			
IP Level	IP66			
IK Level	IK10			
Security Level	1	2	3	4

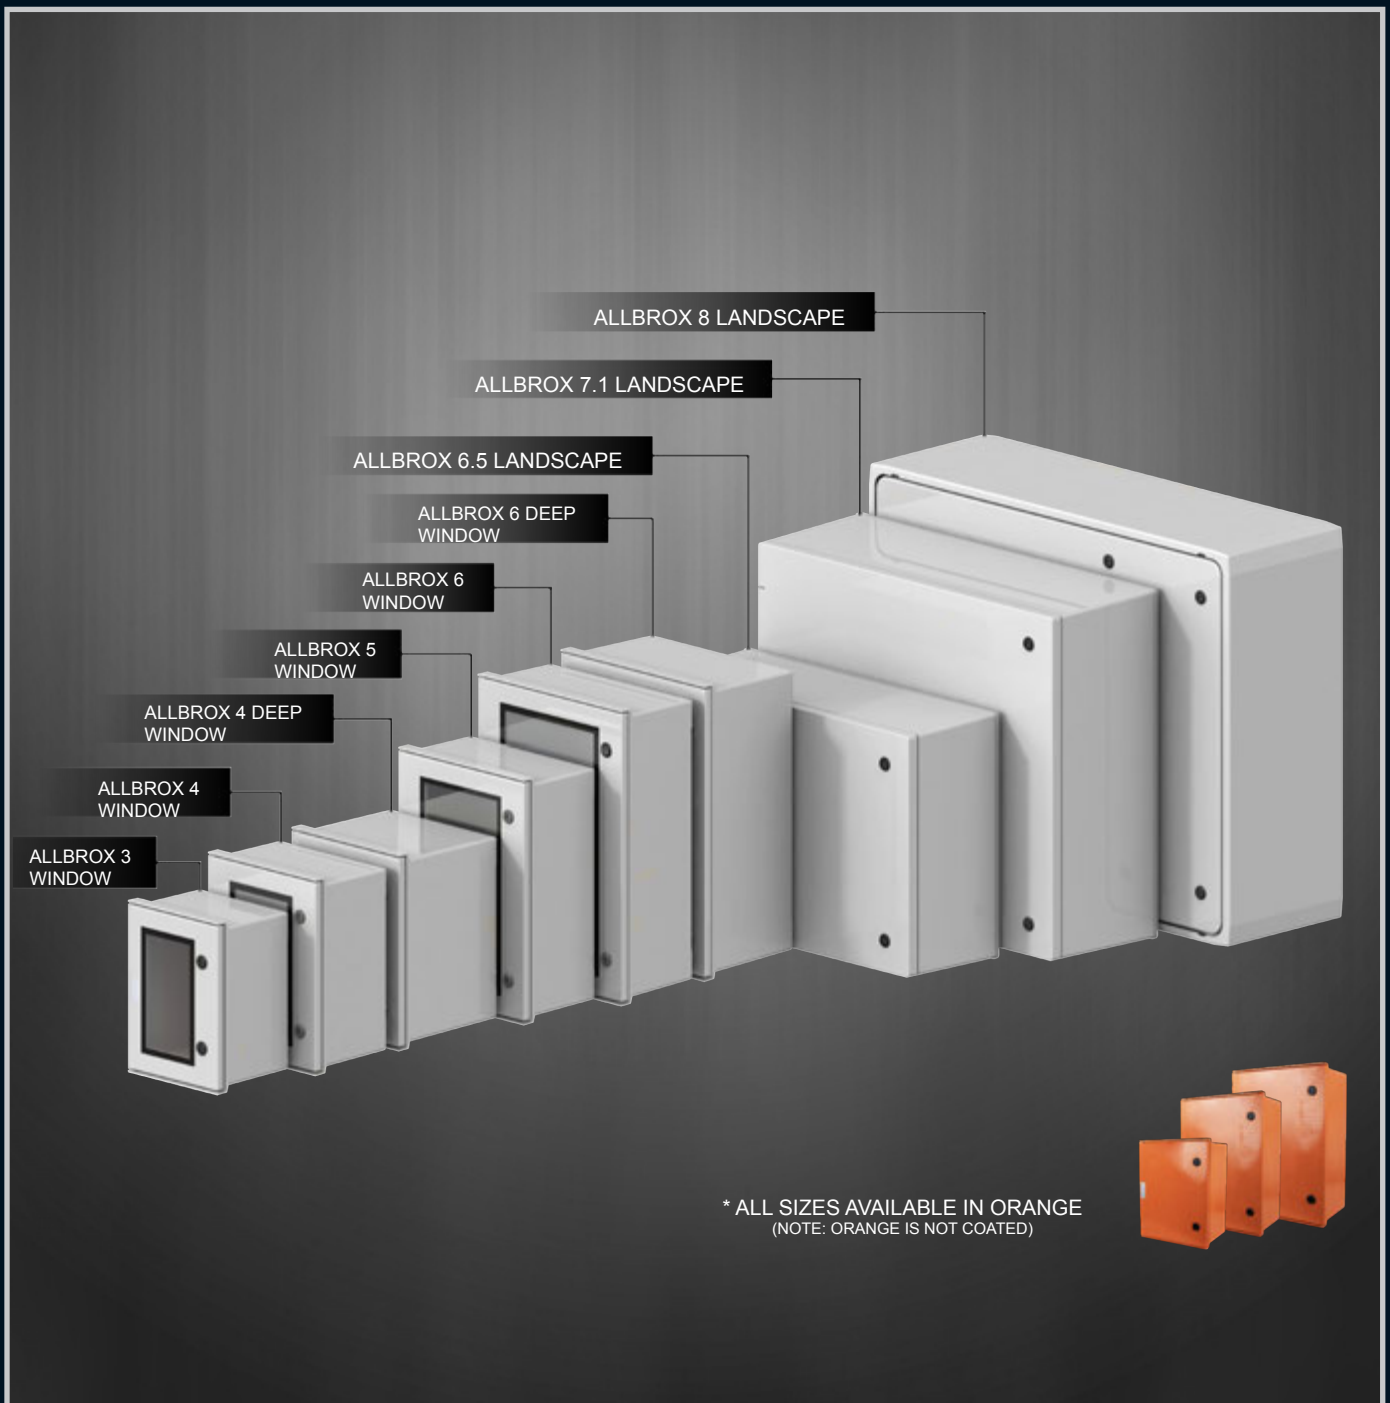

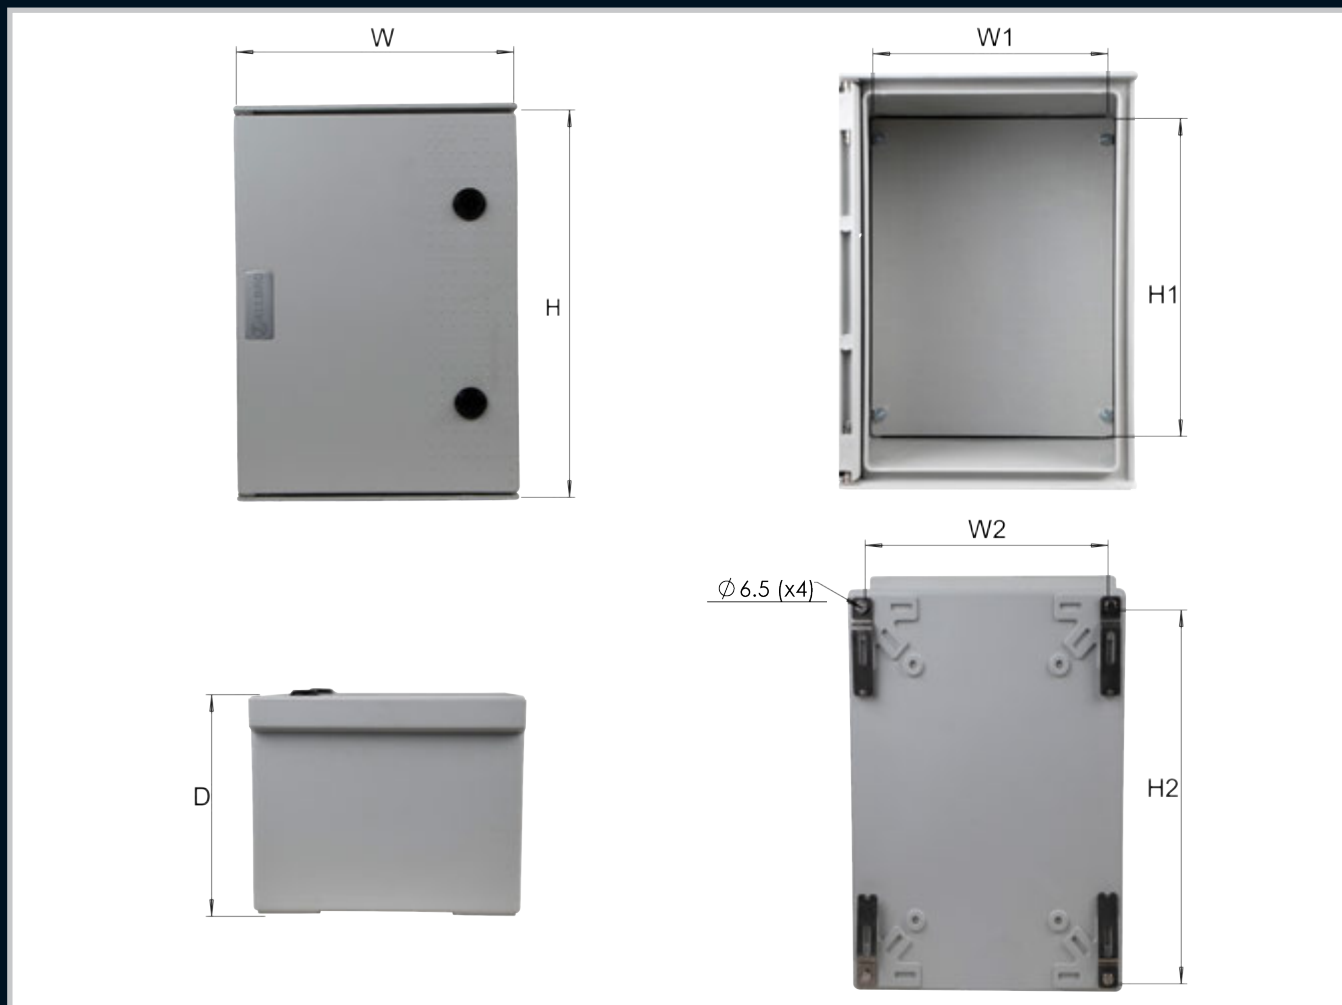

Part Number (Grey)	Part Number (Orange)	Description	H (mm)	W (mm)	D (mm)	W1 (mm)	H1 (mm)
ALL-003	ALL-003/O	Allbrox 3 with SMC Device plate	350	250	200	212	317
ALL-004	ALL-004/O	Allbrox 4 with SMC Device plate	400	300	200	262	364
ALL-004/D	ALL-004/D/O	Allbrox 4 Deep with SMC Device Plate	400	300	273	262	364
ALL-005	ALL-005/O	Allbrox 5 with SMC Device plate	500	350	200	312	467
ALL-006	ALL-006/O	Allbrox 6 with SMC Device plate	600	400	200	362	567
ALL-006/D	ALL-006/D/O	Allbrox 6 Deep with SMC Device Plate	600	400	250	362	567
ALL-006_5-L	ALL-006_5-L/O	Allbrox 6.5 Landscape with SMC Device Plate	500	700	246	619	419
ALL-006_5-P	ALL-006_5-P/O	Allbrox 6.5 Portrait with SMC Device Plate	700	500	246	419	619
ALL-006_5-L/D	ALL-006_5-L/D/O	Allbrox 6.5 Deep Landscape with SMC Device Plate	500	700	366	619	419
ALL-006_5-P/D	ALL-006_5-P/D/O	Allbrox 6.5 Deep Portrait with SMC Device Plate	700	500	366	419	619
ALL-007_1-P	ALL-007_1-P/O	Allbrox 7.1 Portrait with SMC Device plate	828	710	287	634	754
ALL-007_1-L	ALL-007_1-L/O	Allbrox 7.1 Landscape with SMC Device plate	710	828	287	754	634
ALL-008-P	ALL-008-P/O	Allbrox 8 Portrait with SMC Device plate	1000	800	320	710	910
ALL-008-L	ALL-008-L/O	Allbrox 8 Landscape SMC Device plate	800	1000	320	910	710

Allbrox Galvanised Steel Device Plate

Part Number	Description	H (mm)	W (mm)	Thickness
ALL-M/SMPLATE-3	ALL Mounting Steel Plate No.3	311	238	1.6
ALL-M/SMPLATE-4	ALL Mounting Steel Plate No.4	361	288	1.6
ALL-M/SMPLATE-5	ALL Mounting Steel Plate No.5	461	338	1.6
ALL-M/SMPLATE-6	ALL Mounting Steel Plate No.6	554	380	1.6
ALL-M/SMPLATE-6_5	ALL Mounting Steel Plate No.6_5	590,7	390,7	2
ALL-M/SMPLATE-7	ALL Mounting Steel Plate No.7	605	532,7	2